



Assessment of the Safety Margin in the Seismic Design of Foundations Based on ASCE/SEI 41-06 Standard

Alireza Azarbakht^{1*}, Anna Analooei², and Elham Rajabi²

1. Associate Professor, Department of Civil Engineering, Faculty of Engineering, Arak University, Iran, * Corresponding Author; email: a-azarbakht@araku.ac.ir

2. Graduate Student, Department of Civil Engineering, Faculty of Engineering, Arak University, Iran

Received: 18/07/2013

Accepted: 20/04/2014

ABSTRACT

Keywords:

Seismic design; Rehabilitation of foundations; Force reduction factor; Linear static procedure; Nonlinear dynamic procedure; ASCE/SEI 41-06 Standard

The seismic linear demand of structures is usually reduced by employing a force-reduction factor in most of force-based seismic regulations. The current force reduction factors in ASCE/SEI 41-06 standard results in conservative design in the case of foundations when compared to the conventional design regulations e.g. IBC 2000. The aim of the current paper is to evaluate the influence of the Soil-Foundation-Structure-Interaction (SFSI) effects on the force-reduction factor based on ASCE/SEI 41-06 standard. Therefore, a comparison has been made between the results of the nonlinear response history analysis of a set of 3, 6, 10 and 15-storeyed concrete 2-D frames with the result of the equivalent linear static approach. The results show that the equivalent linear static approach load combinations, in the case of foundations, can lead to conservative designs. Finally, a set of new force-reduction factor has been calculated in order to cope with this problem.

1. Introduction

The material nonlinear behaviour of different elements usually dissipates significant amount of seismic input energy. Therefore, on the basis of strength based codes, designers are allowed to divide the elastic force response by a force delivery reduction factor, named J factor in ASCE/SEI-06 standard. The force reduction factor is defined based on several bases including: experimental and analytical aspects, engineering judgement, and structure performance in previous earthquakes [1, 2]. As this factor is different in various regulations, it worth focusing on the subject in order to comprehensively define the force reduction factor. That is, the current research is aimed to calculate the force reduction factor, by comparing the results of equivalent linear static procedure with nonlinear

response history procedure. A set of concrete moment resisting frames with shear walls were selected for the purpose of comparison. The results show that the proposed load combinations in ASCE/SEI 41-06 standard highly overestimate the seismic demand for the force controlled elements, specifically in the case of foundations.

2. Force Delivery Factor in ASCE/SEI 41-06 Standard

According to 3.2.10 in ASCE/SEI 41-06 standard, all the vertical elements, which are parts of lateral load resisting system, shall be designed by taking the overturning moments into account [3]. The implemented seismic force, which is proposed to be used in the linear static procedure, is usually

remarkable compared with the force that is usually recommended by design codes. This force is only reduced with the force delivery factor (J factor). Additionally, the force controlled elements actions are checked with the seismic force that is reduced with J factor. However, this factor is set to be between 1 and 2. For example, J factor is equal to unity in the case of immediate occupancy performance level which is also the case in the current research. The most important consequence is that the seismic demand for the elements, which are controlled with the force action, is remarkable that results in conservative design compared with past design regulations. To cope with this problem, a set of concrete 2-D frames were considered in order to comprehensively investigate the ability of new factors in estimating seismic demands on foundations. The details are discussed in the following sections.

3. Test Structures and Analytical Models

A set of 2-D concrete moment resisting frames with shear wall, containing 3, 6, 10 and 15-storeyed frames, were designed according to FEMA450 static linear guidelines [4], as schematically shown in Figure (1). Three types of soil, consisting hard, medium and soft, were taken into account introduced through site classes B, C and D. The shear walls were considered in the design procedure since SFSI effects are significant in the case of stiff structures [5]. The storey height and the bay length are, respectively, equal to 350 and 600 cm as seen in Figure 1. The shear wall thickness is 25 cm for the 3 and 6-storeyed frames, and it is equal to 30 cm for 10 and 15-storeyed frames [5], [6] and [7].

With identified category and shear wave velocity for the site classes, satisfactory values were estimated to represent their design parameters

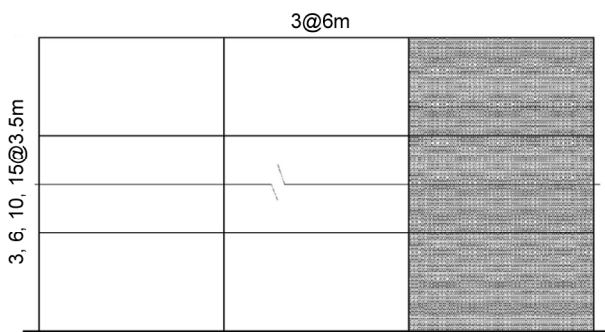


Figure 1. Elevation of the considered frames.

according to several well-known geotechnical references [8], [9] and [10]. The gravity loads were selected based on values typically employed in engineering practice. Therefore, 3, 6, 10 and 15-storeyed frames had masses equal to 307, 640, 927 and 1511 tons, respectively. Further, equivalent lateral design forces were determined according to FEMA450 guidelines, i.e. the design spectrum for each site class was derived as seen in Figure (2), and the corresponding design base shears were calculated [4]. Both gravity and seismic loads were later imposed on the frames according to the counteractive load combinations of ASCE/SEI7-05 standard [3] (The reader is referred to Section 12.4.2.3 of ASCE/SEI7-05 for further details).

The given frames were designed as special frames based on FEMA450 guidelines. According to these guidelines, 15-storeyed frames should be designed considering dual lateral resisting systems. The gravity loads for the designed 3, 6, 10 and 15-storeyed frames are, respectively, shown in Tables (1) to (4).

Table 1. Gravity loads for the designed 3 storeyed frame.

No. of Storey	DL (kg/m)	PL (kg/m)	No. of Bays	L(m)	Load Weight (kg)
3	3600	0	3	5.55	53946
1-2	3900	600	3	5.55	67432.5

Table 2. Gravity loads for the designed 6 storeyed frame.

No. of Storey	DL (kg/m)	PL (kg/m)	No. of Bays	L(m)	Load Weight (kg)
6	3600	0	3	5.55	53946
Other	3900	600	3	5.55	67432.5

Table 3. Gravity loads for the designed 10-storeyed frame.

No. of Storey	DL (kg/m)	PL (kg/m)	No. of Bays	L(m)	Load Weight (kg)
10	2700	0	3	5.55	40459.5
4-9	3000	600	3	5.55	53946
1-3	3000	600	3	5.45	52974

Table 4. Gravity loads for the designed 15-storeyed frame.

No. of Storey	DL (kg/m)	PL (kg/m)	No. of Bays	L(m)	Load Weight (kg)
15	2700	0	3	5.55	40459.5
9-14	3000	600	3	5.55	53946
5-8	3000	600	3	5.4	52488
1-4	3000	600	3	5.3	51516

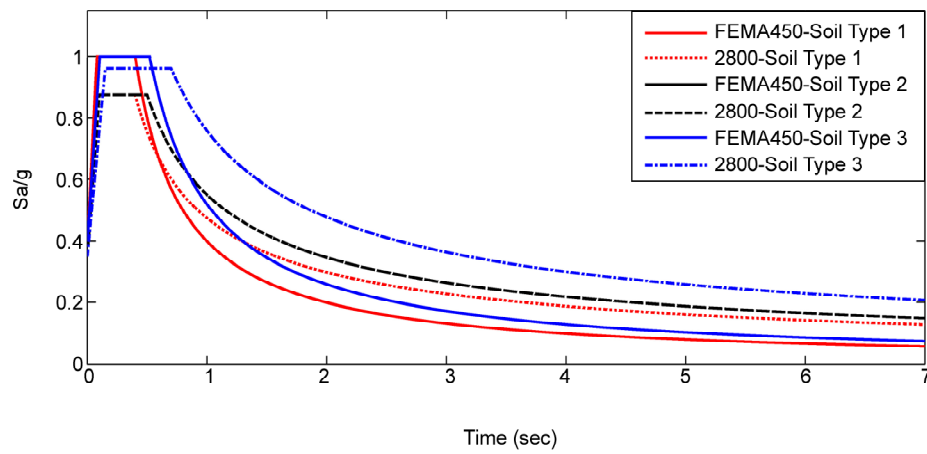


Figure 2. Design spectrum according to FEMA450 and Iranian guidelines.

The strip footings of width 2.0-4.6 m, length 19.6-20.0 m and fixed height 1.0 m, were designed for all frames. Subsequently, the complete numerical models of the Concrete Shear Wall (CSW) frames were constructed through an appropriate assembly of nonlinear shear wall elements and nonlinear beam-column elements.

3.1. Frames Modelling

The seismic nonlinear behaviour of frame elements plays the most important role in the global behaviour of the considered frames. The Opensees framework [11] was utilized for the purpose of response history analysis. The nonlinear beam element with concentrated hinges was employed for the beam modelling. Beams with concentrated plastic hinges and columns of fibre section were employed to simulate the nonlinear flexural behaviour of the moment frames. The beam WithHinges element was chosen for beams. Hence,

a pre-determined length at both ends was allocated to plastic hinges and an elastic material was assigned to the mid-span. As the nonlinear behaviour was assumed to be idealized in the hinges, expansion of the nonlinearity to the elastic region was less likely to happen. Therefore, the coefficient of cracking was set equal to 0.5 for the elastic segment of the beams. Nonlinear behaviour of the plastic hinges was defined in accordance with Haselton et al. [12], Figure (3). Essential relationships are proposed in their study for the calibration of numerous test results in the form of the tri-linear backbone curve suggested by Ibarra [13, 14]. An important feature of the model is that softening due to concrete crushing, reinforcement buckling, yielding and bond slip can be considered in the negative stiffness region, namely post cap behaviour [12].

The tri-linear Ibarra model, as discussed above, was employed in the Opensees platform using the Clough material proposed by Altoontash [15].

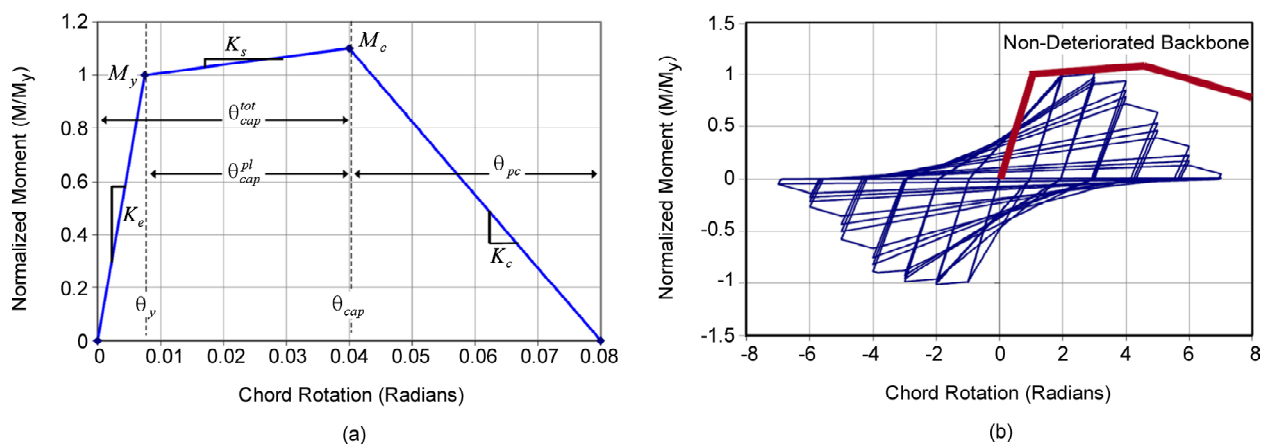


Figure 3. Monotonic and cyclic behaviour of component model [12, 13].

Subsequently, uniaxial sections, according to the Clough material, were assigned to the plastic hinges. It should be noted that all parameters, calculated to form the Ibarra model, were in terms of rotations. In order to make them applicable to a beam WithHinge element, the simple equation (curvature, rotation and plastic hinge length), was used to transform rotations into curvatures which is an advantage of the selected beam element. The plastic hinge's length was set to be equal to beam's height for all cases.

Columns were modelled by means of fibre method with the capability of developing distributed plasticity along the element's length. This choice was made mostly due to the fact that the flexural behaviour in columns is highly dependent on the interaction of their axial and bending forces. However, the aforementioned approach for beams was incapable of considering variable axial forces during the analysis. The fibre sections were assigned to Nonlinear Beam Column elements. Besides, each element was divided into four sub-elements in a storey level to provide more robustness.

3.2. Shear Wall Modelling

Recently, 'Flexure-Shear Interaction Displacement-Based Beam-Column' element has been developed in the Opensees platform on the basis of the formerly used Multiple Vertical-Line-Element Model (MVLEM). In this new element, the previous multiple vertical columns are defined as fibres of a section. The interaction between the flexural and shear behaviour is provided by assigning a biaxial response to the fibres, incorporating a membrane material model. The flexure-shear interaction displacement-based beam-column element was thus selected to simulate the shear wall element in Opensees platform because of its inclusive features. In particular, with its application, the numerical models showed proper agreement with the characteristics of the designed frames. More information about the element can be found in Orakcal et al. [16]. The definition of the boundary elements was also provided in the model. Hence, the resulting shear wall element would take the form of a single column. However, attaching this column to the moment frame was quite difficult. To cope with this problem, the mid-panel of the shear wall was constructed with the flexure-shear interaction displacement-based beam-column element while the boundary elements

were modelled as columns of the main frame. To enhance the robustness, each element was divided into four sub-elements in a story level. End node, located at the same elevation of the boundary elements and the mid-panel column element, was then joined by means of rigid beams. This provided an integrated simulation of the whole shear wall system. As it is obvious, the system could benefit from the top features of both flexure-shear interaction model and fibre section.

3.3. Soil-Footing Interface Modelling

The Beam on Nonlinear Winkler Foundation (BNWF) was employed to model the soil-footing interface [17]. It is capable of simulating the uplift and rocking motions (geometrical nonlinearity) as well as the nonlinear behaviour of the soil (material nonlinearity). Furthermore, it allows for likely changes in soil spring's stiffness and spacing along the foundation length [18]. In this study, the BNWF numerical model was constructed through assigning NonlinearBeamColumn and ZeroLength elements to the strip footing and soil springs, respectively. It is worth mentioning that the beam at the base of the shear wall was set to be rigid due to high flexural stiffness that the shear wall added to the footing's rigidity. In addition, the footing was constrained against sliding [16, 19, 20]. In order to define the Winkler springs, first their properties were determined according to different site classes and the corresponding footing dimensions. Second, Qzsimple1 material (in Opensees) was chosen to represent the soil behaviour according to the computed parameters. Moreover, the Gazetas concentrated stiffness [21] was employed to define the stiffness of the soil springs. Therefore, the distributed stiffness of the Winkler foundation was actually estimated based on continuum approaches. Initially, the total vertical and rotational stiffness of the footing-soil systems were found according to Gazetas proposed relationships. A specific distribution of the Winkler springs with varying stiffness was later selected for each system to produce the same total vertical and rotational concentrated stiffness.

It has been experimentally established that during the rocking motion, a higher stiffness would develop in the soil medium at the compression zones. The so-called rounding phenomenon happens to retain the stability of the structure [22]. Accordingly,

more stiff springs were placed at the ends of the footing strip to supply the rotational stiffness of the soil-footing system. The end lengths were determined based on [22]. Finally, a contribution of vertical springs of particular stiffness, located in the middle and end zones of the footing strip, was chosen based on [23]. Likewise, the strength of the Winkler springs was calculated according to the bearing capacity of the foundations. Among several equations available to determine the bearing capacity, the Terzaghi's relationship (1943) is widely employed in engineering problems [24]. However, a more rigorous form of the Terzaghi's relationship, proposed by Meyerhof (1963) [25], was selected to estimate the foundation bearing capacities in this study.

4. Linear Static Procedure Results

The linear static procedure in ASCE/SEI 41-06 standard is the simplest procedure for the analysis of structures. The lateral loads effects are combined with the gravity loads effects by employing contractive and additive load combinations [3]. However, the contractive load combination is chosen in this study, as written in Eq. (1), since it provides more critical situations when the SFSI effects are taken into account when compared with the additive load combination [5]. The main reason is that the uplift phenomenon is more likely to happen in the case of contractive load combination when compared with the additive load combination.

$$Q_G = 0.9Q_D \tag{1}$$

where Q_D is the dead load. The lateral base shear is calculated by using Eq. (2).

$$V = C_1 C_2 C_m S_a W \tag{2}$$

where C_1 is the modification factor to relate the expected maximum inelastic displacements to the displacements calculated for linear elastic response, C_2 is the modification factor to represent the effect of pinched hysteresis shape, cyclic stiffness degradation, and strength deterioration on maximum displacement response, C_m is the effective mass factor to account for higher mode mass participation effects, S_a is response spectrum acceleration at the fundamental period of structure and damping ratio of the building in the direction under consideration, and W is the effective seismic weight of building.

The natural period of the given frames, obtained from eigenvalue analysis, with the corresponding base shear are shown in Table (5).

The overturning check is usually done according to Eq. (3). On the other hand, if the elements tension strength is taken into account, then, Eq. (4) is permitted to be used instead of Eq. (3). In Eq. (3), MOT is the total overturning moment induced on the element by the seismic forces applied at structural above level under consideration, MST is the stabilizing moment produced by dead loads acting on the element, R_{OT} is the modification factor to overturning moment. R_{OT} depends on the structure performance in which in the case of IO is taken equal to 4 in the current study.

$$M_{ST} > \frac{M_{OT}}{C_1 C_2 J} \tag{3}$$

$$0.9M_{ST} > \frac{M_{OT}}{C_1 C_2 R_{OT}} \tag{4}$$

Table 5. Base shear calculated in the linear static procedure.

No. of Storey	Type of Soil	W (kg)	T (sec)	Effective Mass of First Mode	V (kg)
3	B	267100	0.124	78.53	296809
	C				315370
	D				347900
6	B	543107	0.369	69.38	619242
	C				645418
	D				687954
10	B	790807	0.790	64.47	411247
	C				546945
	D				646591
15	B	1292088	1.397	61.24	371873
	C				485701
	D				564813

The resulted overturning safety factors are shown in Table (6). The results revealed that the overturning safety factor is less than unity in many cases when Eq. (3) is employed. On the other hand, it is always greater than unity in the case of Eq. (4).

It is assumed that the sliding phenomenon is not happened in the soil-foundation modelling. To check the validity of this assumption, the sliding strength is calculated according to Eq. (5). C is the cohesion of the soil on the surface area of the foundation (A) and f_s is the friction force between the bottom of the foundation and the subsoil.

$$V_{ST} = CA + f_s \tag{5}$$

The sliding safety factor is then determined on the basis of either Eq. (6), that is based on R_{OT} factor, or Eq. (7), that uses J factor. The resulted sliding safety factors are shown in Table (7) separately based on Eqs. (6) and (7). The obtained sliding safety factors again show that employing J factor, based on Eq. (7) tends to conservative results compared with Eq. (6), which employs R_{OT} factor. This result is an important challenge in the ASCE/SEI 41-06 standard that needs to be more elaborated. That is, the issue is more investigated in the following section by using nonlinear response history analyses.

$$SF_{sliding} = \frac{0.9V_{ST}}{\frac{V_{base}}{C_1 C_2 R_{OT}}} = \frac{0.9(w \tan \phi)}{\frac{V_{base}}{C_1 C_2 R_{OT}}} \tag{6}$$

$$SF_{sliding} = \frac{0.9V_{ST}}{\frac{V_{base}}{C_1 C_2 J}} = \frac{0.9(w \tan \phi)}{\frac{V_{base}}{C_1 C_2 J}} \tag{7}$$

5. Nonlinear Dynamic Procedure Results

The nonlinear response history analysis can be accounted as the point of comparison in order to judge which factor (J or R_{OT}) can tend to more realistic results. Nonlinear behaviour of different structural elements were defined as described in Section 3. The gravity load was then applied on each frame before response history begins. The direct integration algorithm was employed in order to perform nonlinear response history analysis.

As the input ground motion selection can significantly change the nonlinear response of structures, the procedure for record selection which has been

Table 6. Overturning safety factor in the linear static procedure.

No. of Storey	Type of Soil	Equation (3)	Equation (4)
3	B	1.0754	4.3017
	C	1.0121	4.0474
	D	0.9175	3.6700
6	B	0.6449	2.5797
	C	0.6247	2.4990
	D	0.5947	2.3788
10	B	0.6734	2.6937
	C	0.5805	2.3220
	D	0.5246	2.0984
15	B	0.6802	2.7206
	C	0.5478	2.1910
	D	0.4828	1.9313

Table 7. Sliding safety factor in the linear static procedure.

No. of Storey	Type of Soil	J	R_{OT}
3	B	0.8954	3.5817
	C	0.7082	2.8327
	D	0.5387	2.1547
6	B	0.9894	3.9578
	C	0.8093	3.2372
	D	0.6511	2.6043
10	B	1.3270	5.3072
	C	1.0407	4.1630
	D	0.8256	3.3024
15	B	1.7923	7.1691
	C	1.2817	5.1267
	D	0.9758	3.9032

proposed by Ghafory Ashtiany et al. [26] was employed in this research. The main philosophy in the chosen record selection algorithm is to choose a few strong ground motion records in order to get approximately the same result as a large set of records. The computational time is significantly decreased by employing the mentioned method. The records were selected in accordance with the natural period of each frame. The selected records are appropriate to estimate the un-biased median response of structures. The selected records can be found in Table (8) and the corresponding spectra are shown in Figures (4) to (7). Each record is scaled by using Eq. (8).

$$AccX - Factor = \frac{S_a \times g}{S_{a_{original}}} \tag{8}$$

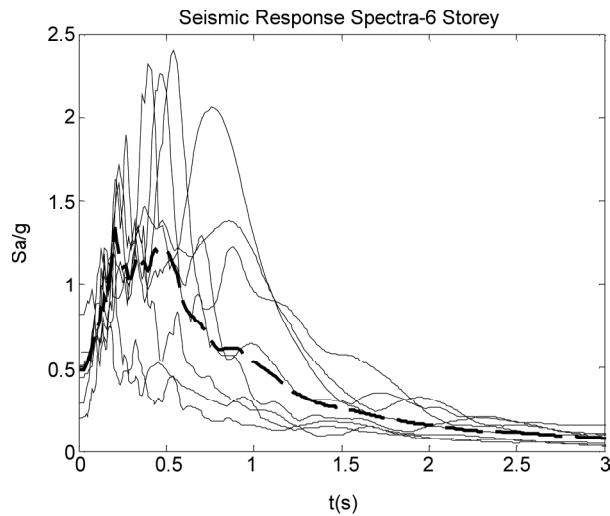


Figure 4. Eight records response spectra for 6-storeyed frame in the nonlinear dynamic procedure.

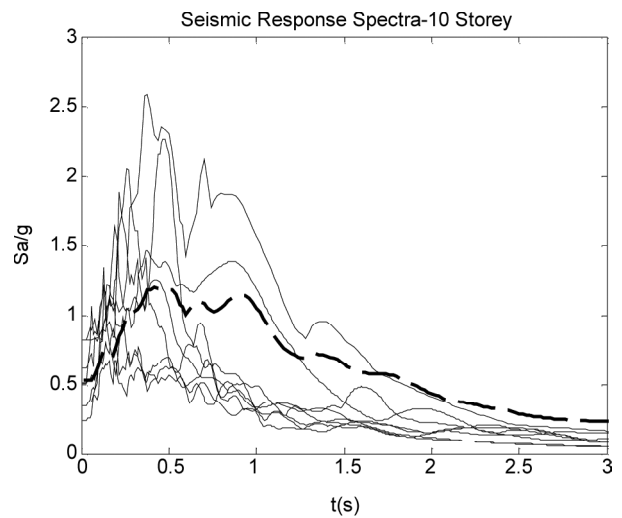


Figure 7. Eight records response spectra for 10-storeyed frame in the nonlinear dynamic procedure.

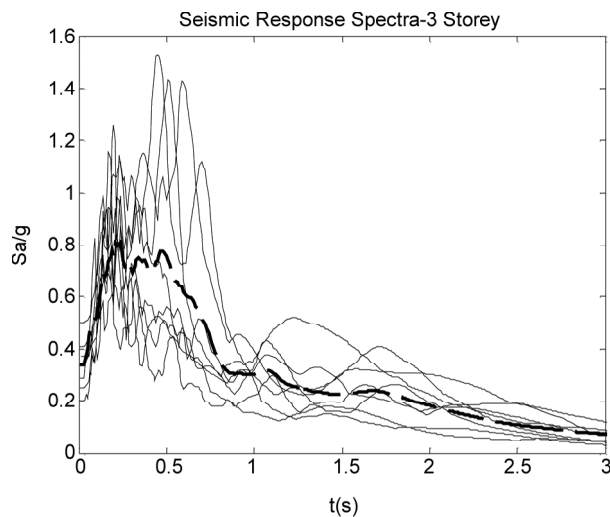


Figure 5. Eight records response spectra for 3-storeyed frame in the nonlinear dynamic procedure.

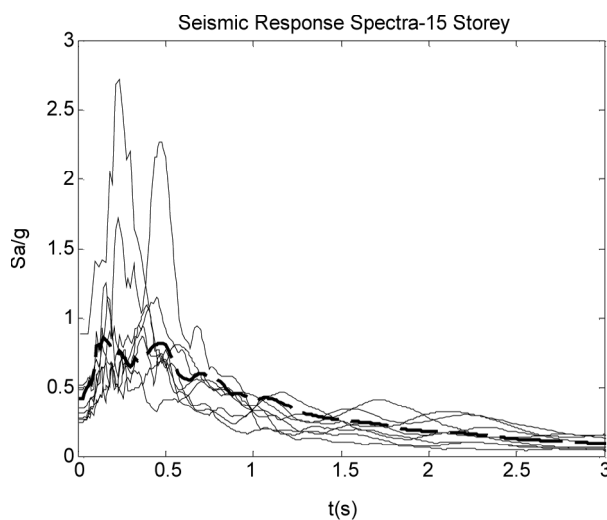


Figure 6. Eight records response spectra for 15-storeyed frame in the nonlinear dynamic procedure.

Table 8. The near-optimal SGMs for different period ranges [26].

Ground Motion Subset	Period (sec)	SGM's ID
1	0.1-0.3	3-8-14-20-21-24-27-28
2	0.3-0.5	2-4-10-12-20-21-23-30
3	0.5-0.7	1-4-6-10-12-15-17-23
4	0.7-0.9	1-4-12-22-23-24-25-26
5	0.9-1.25	8-9-12-15-16-22-23-29
6	0.25-2	5-7-13-15-19-23-28-31

where S_a is the response spectrum acceleration at the fundamental period and damping ratio of the building in the direction under consideration, g is the gravity acceleration and S_a original is the maximum response acceleration which depends on ground acceleration, damping ratio, time step and fundamental period of building.

6. Discussion of the Results

Structural analysis using linear and nonlinear procedure usually leads to different results. One of the reasons is modelling nonlinear behaviour of elements and materials in the dynamic analysis. In addition, increasing the energy absorption by the elements in inelastic range is not considered in the linear procedures. Hence, dynamic procedure result is more convenient and economical in comparison with the static procedure. Thus, to overcome these deficiencies, design codes and standards propose using force reduction factor in linear procedures. According to ASCE/SEI 41-06 standard, J factor

has been used in the load combination of force-controlled members (such as foundation) and calculation of overturning and sliding safety factors. Hence, in this section, foundation design forces

including base shear and base moment as well as overturning and sliding safety factors were calculated and then compared in the case of linear static and nonlinear dynamic procedure, Figures (8) and (9).

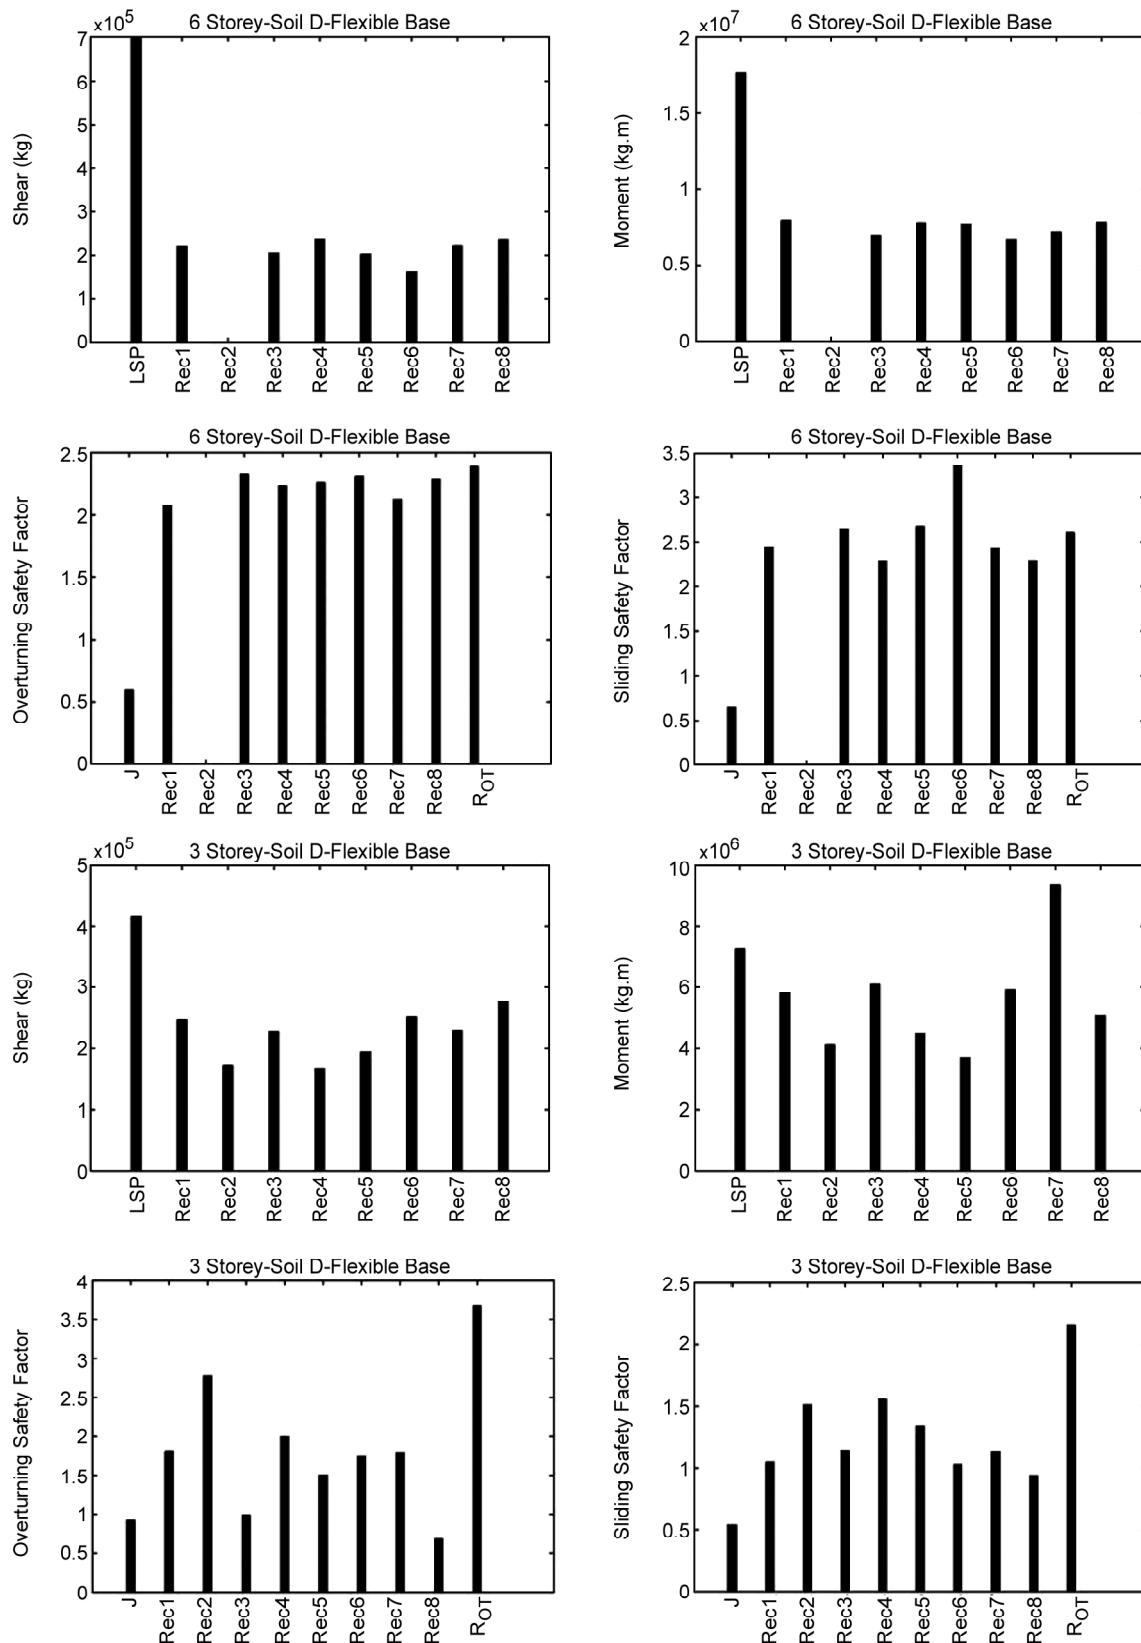


Figure 8. Force reduction factor in the case of evaluation of overturning and sliding safety factors, base shear and design moment of foundations for 3 and 6-storeyed frame.

As seen in Figures (8) and (9), LSP, Rec1 to Rec8, J and R_{OT} refer, respectively, to linear static procedure results, result of nonlinear dynamic procedure according to eight selected records, and safety

factors calculated based on Eqs. (3) to (7). In the case of non-convergence, e.g. six storeyed frame on the basis of record number two, J factor is set to zero due to the structural global instability.

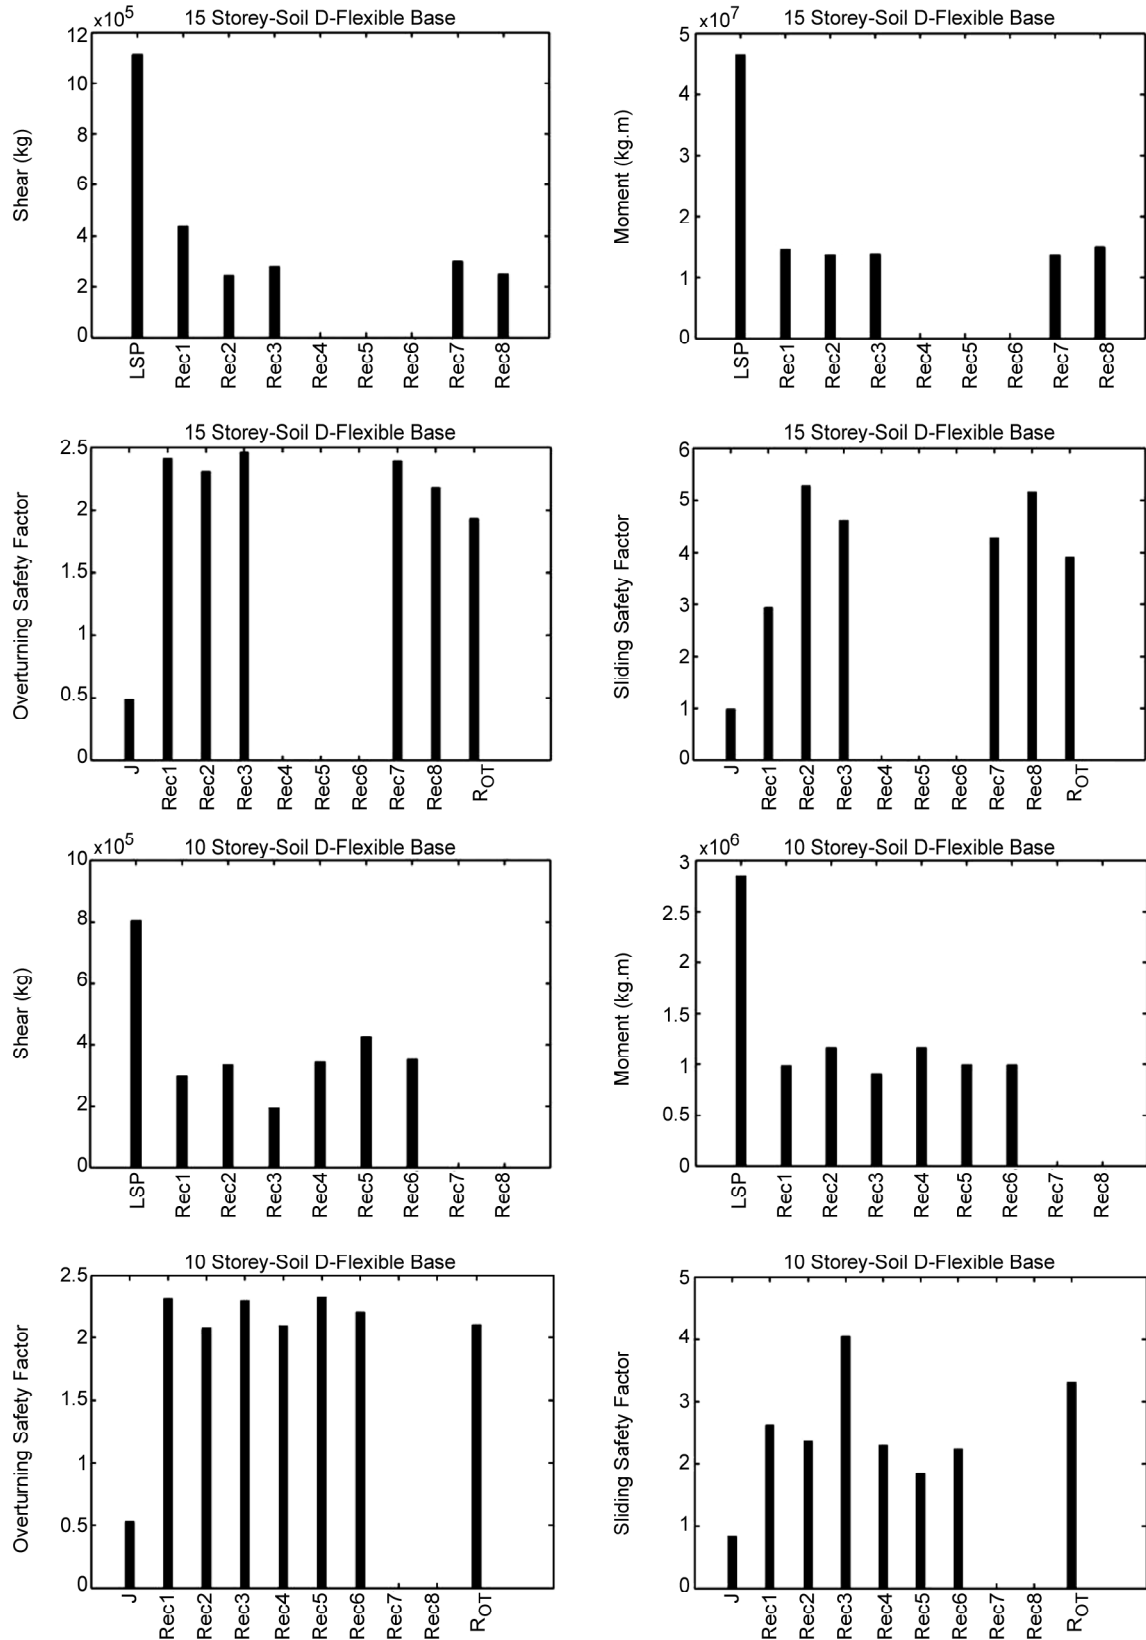


Figure 9. Force reduction factor in the case of evaluation of overturning and sliding safety factors, base shear and design moment of foundations for 10 and 15-storeyed frame.

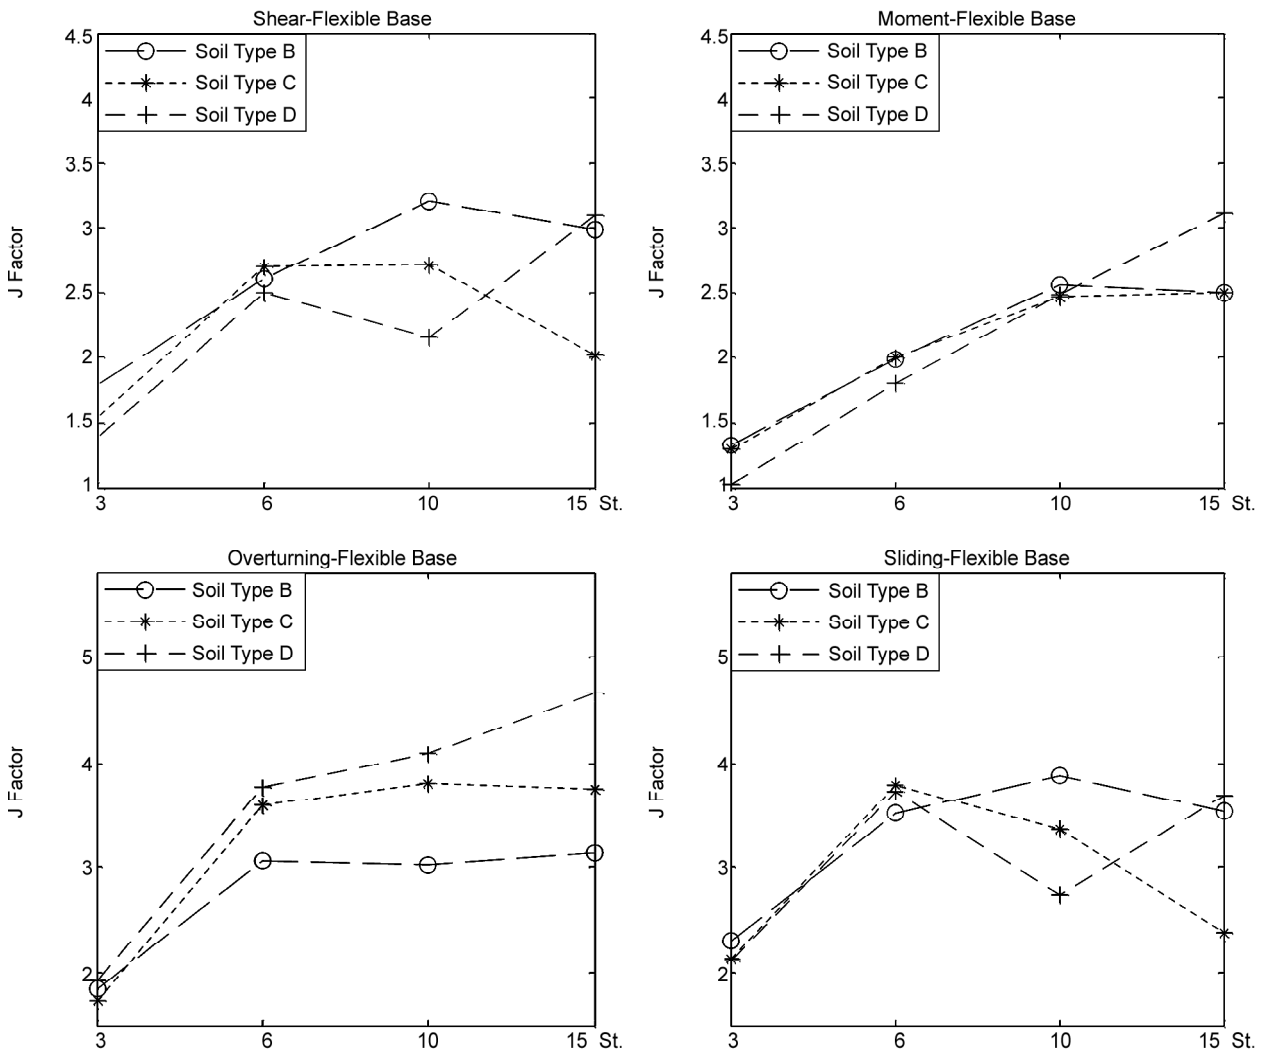


Figure 10. Calculated force reduction factor for the case of flexible-base assumption.

Comparison of values in Figures (8) and (9) show that there is a large discrepancy between the results. Therefore, in order to reduce the mismatch between the methods, a new value of the force reduction factor (J factor) is calculated. The new J factor based on calculation of overturning and sliding safety factor is determined based on Eq. (9).

$$J = \frac{S.F. \times M_{OT}}{M_{ST}} \quad (9)$$

where S.F. is the safety factor calculated based on nonlinear dynamic procedure. The other parameters were defined in the previous sections. Similarly, the new J factor according to calculation of foundation design forces is determined as follows:

$$J = \frac{F_S}{F_D \times C_1 \times C_2} \quad (10)$$

where F_S and F_D are the forces, respectively, in the

linear and nonlinear procedures. The calculated force reduction factor based on soil type and number of storeys for the case of flexible-base assumption is shown in Figure (10). The calculated J factor in this study, as seen in Figure (10), is in accordance with Eq. (11).

$$J = \alpha N + \beta \quad (11)$$

where J is referred to new force reduction factor and N referred to number of stories. The coefficients α and β depend on soil type and number of stories as shown in Table (9).

In order to validate the results, J factor based on LSP , in the case of 10-storeyed frame with the flexible base on soft soil condition are shown in Table (10). A good agreement is seen between Tables (9) and (10), which is an evidence of the applicability of the calculated J factor.

Table 9. Coefficients to be used in Eq. (11).

		No. of Storey			
		Soil type	N<6	6≤N<10	10≤N
Overturning	α	B	0.402	-0.011	0.021
		C	0.617	0.052	-0.009
		D	0.613	0.082	0.110
	β	B	0.630	3.137	2.815
		C	-0.116	3.276	3.881
		D	0.087	3.278	2.992
Sliding	α	B	0.402	0.088	-0.066
		C	0.550	-0.106	-0.194
		D	0.542	-0.249	0.191
	β	B	1.105	2.990	4.537
		C	0.483	4.418	5.297
		D	0.481	5.225	0.831
Base shear	α	B	0.268	0.149	-0.041
		C	0.375	0.006	-0.140
		D	0.363	-0.083	0.186
	β	B	0.996	1.712	3.615
		C	0.441	2.655	4.114
		D	0.313	2.988	0.300
Base moment	α	B	0.221	0.139	-0.010
		C	0.235	0.115	0.007
		D	0.258	0.170	0.125
	β	B	0.671	1.160	2.655
		C	0.595	1.314	2.399
		D	0.251	0.782	1.227

Table 10. J factor based on LSP.

Moment	Shear	Sliding	Overturning	J
2.482	2.161	2.739	4.093	J

7. Conclusion

The gravity and the seismic demand is reduced, in the case of force-controlled members, by *J* factor on the basis of ASCE/SEI 41-06 standard. The calculated *J* factor plays a significant role for the final output design. As *J* factor is limited between 1 and 2, it has been shown in this study that the obtained demand in force-controlled members is relatively conservative. Therefore, a set of 3, 6, 10 and 15-storeyed frames were taken into account. Nonlinear response history analysis was, then, employed in order to evaluate the equivalent linear static procedure. The obtained results show that the base shear as well as the overturning moment in the LSP are always greater than nonlinear dynamic procedure results in which confirms that LSP is a conservative approach. This conservation is more

highlighted in the case of taller frames and softer soils. Finally, a set of *J* factors are calculated for different frame height and different soils in order to decrease the conservatism in the LSP.

References

- Mehrain, M. (2012) Personal Communication.
- Whittaker, A. (2012) Personal Communication.
- ASCE/SEI 41-06 (2007) *Seismic Rehabilitation of Existing Buildings*. American Society of Civil Engineers. 1801 Alexander Bell Drive, Reston, Virginia 20191.
- FEMA (2004) *NEHRP Recommended Provisions for Seismic Regulations for New Buildings and other Structures* (FEMA 450), 2003 Edition, Part 1: Program on Improved Seismic Safety Provisions. Building Seismic Safety Council National Institute of Building Sciences Washington, D.C.
- Marzban, S., Banazadeh, M., and Azarbakht, A. (2012) Seismic Performance of Reinforced Concrete Shear Wall Frames Considering Soil-Foundation-Structure Interaction. *The Structural Design of Tall and Special Buildings*. DOI: 10.1002/tal.1048.
- Rajabi, E. (2011) Effect of the soil-Foundation-Structure Interaction on the Component Demand Modifier Factor Based on the Iranian Instruction for Seismic Rehabilitation of Existing Buildings. (Master Degree Thesis), (in Persian).
- Azarbakht, A. and Rajabi, E. (2012) Effects of the Soil-Foundation-Structure Interaction on the Component Demand Modifier Factor of Concrete Gravity Beams based on ASCE 41-06 Standard. *Journal of the Structural Engineering and Geotechnics*.
- Chuanromanee, O., Hanson, R.D., and Woods, R.D. (1995) The Influence of Soil Structure Interaction on the Overall Damping of Structures with High Damping. Crete, Greece. *7th International Conference on Soil Dynamics and Earthquake Engineering (SDEE 95)*, 575-582.
- Bhattacharya, K., and Dutta, S.C. (2004) Assessing Lateral Period of Building Frames

- Incorporating Soil- Flexibility. *Journal of Sound and Vibration*.
10. Barcena, A. and Esteva, L. (2007) Influence of Dynamic Soil- Structure Interaction on the Nonlinear Response and Seismic Reliability of multistory Systems. *Earthquake Engineering and Structural Dynamics*.
 11. Opensees (2006) OpenSees Command Language Manual. Open System for Earthquake Engineering Simulation. Mazzoni, S., McKenna, F., Scott. M.H., and Fenves, G.L. Available at <http://opensees.berkeley.edu/>.
 12. Haselton, C.B., Lang, S.T., Liel, A.B., and Deierlein, G.G. (2007) *Beam-Column Element Model Calibrated for Predicting Flexural Response Leading to Global Collapse of RC Frame Buildings*. Report NO. PEER Report 2007/03. Berkeley Pacific Earthquake Engineering Research Center College of Engineering University of California.
 13. Ibarra, Luis F. (2003) *Global Collapse of Frame Structures under Seismic Excitations*. Diss. Stanford University.
 14. Ibarra, L.F., Medina, R.A., and Krawinkler, H. (2005) Hysteretic Models that Incorporate Strength and Stiffness Deterioration. *Earthquake Engineering & Structural Dynamics*, **34**, 1489-1511.
 15. Altoontash, A. (2004) *Simulation and Damage Models for Performance Assessment of Reinforced Concrete Beam-Column Joints*. Diss. Stanford University.
 16. Kutay, O., Massone Sanchez, L.M., and Wallace, J.W. (2006) *Analytical Modeling of Reinforced Concrete Walls for Predicting Flexural and Coupled-Shear-Flexural Responses*. Pacific Earthquake Engineering Research Center, College of Engineering, University of California, Berkeley.
 17. Prishati, R. and Hutchinson, T.C. (2009) Performance evaluation of a nonlinear Winkler-based shallow foundation model using centrifuge test results. *Earthquake Engineering and Structural Dynamics*, **38**(5), 679-698.
 18. Harden, Ch.W., and Hutchinson, T.C. (2009) Beam-on-nonlinear-Winkler-foundation modeling of shallow, rocking-dominated footings. *Earthquake Spectra*, **25**(2), 277-300.
 19. Alfonso, V., Bertero, V.V. , and Colotti, V. (1988) Analytical modeling of R/C structural walls. *Procs. 9th WCEE* 6, 41-46.
 20. Fischinger, M., Vidic, T., Selih, J., Fajfar, P., Zhang, H.Y., and Damjanic, F.B. (1990) Validation of a macroscopic model for cyclic response prediction of RC walls. In N.B. Bicanic, and H. Mang (eds.): *Computer Aided Analysis and Design of Concrete Structures* (2). Pineridge Press. Swansea, United Kingdom, 1131-1142.
 21. Gazetas, G. (1991) *Foundation Vibrations*. Foundation Engineering handbook 2, 553-593.
 22. Chad, H. (2005) *Numerical Modeling of the Nonlinear Cyclic Response of Shallow Foundations*. Pacific Earthquake Engineering Research Center, College of Engineering, University of California.
 23. Applied Technology Council. ATC 40 (1996) *The Seismic Evaluation and Retrofit of Concrete Buildings. I & II*, Redwood, California.
 24. Terzaghi, K.V. (1995) Evaluation of coefficients of subgrade reaction. *Geotechnique*, **5**(4), 297-326.
 25. Meyerhof, G.G. (1963) Some recent research on the bearing capacity of foundations. *Canadian Geotechnical Journal*, **1**(1), 16-26.
 26. Ghafory-Ashtiany, M., Mousavi, M., and Azarbakht, A. (2011) Strong ground motion record selection for the reliable prediction of the mean seismic collapse capacity of a structure group. *Earthquake Engineering and Structural Dynamics*, **40**(6), 691-708.